

WAT-1300 (G3.6) 1/3.2" Ultra-compact High Sensitivity Day/Night Camera

Ultra-compact, lightweight, and low-voltage design ideal for embedded applications

NEW




***NO CE & FCC**

Key features

- HD-SDI 720/60p and 50p output formats enable smooth video recording with minimal delay
- Low power consumption and low heat generation by using a 1 megapixel sensor
- High sensitivity enables clear images even in low-light environments
- Despite its small size, the camera is equipped with a day/night function by using a dual-pass filter
- Various optional M12 lenses available *Std. lens: G3.6
- Advanced setting available by OSD (On Screen Display) through an optional remote controller

Dimensions

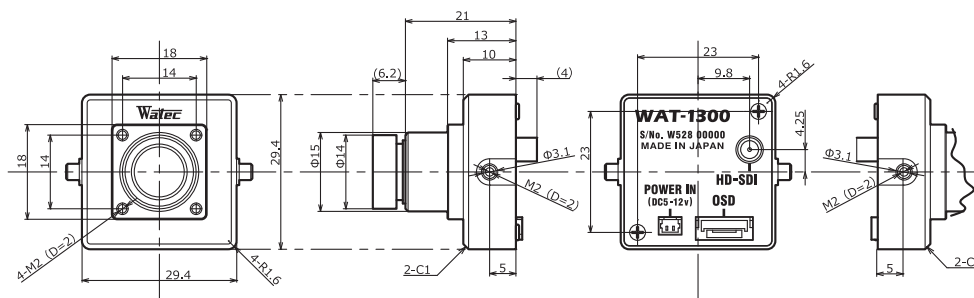


Specifications

Pick-up element		1/3.2 inch CMOS image sensor
Number of effective pixels		1280(H) × 720(V)
Unit cell size		3.5μm(H) × 3.5μm(V)
Imaging system		RGB+W array mosaic filters on chip
Synchronizing system		Internal
Scanning system		Progressive
Video outputs		HD-SDI
		—
Output format		720/60p, 720/50p*
Resolution (H)		More than 650 (Center)
Minimum illumination		0.006 lx F2.0 (AGC ON=54dB, Shutter=OFF)
		—
S/N		More than 50dB (AGC OFF=0dB, γ=1.0)
Function settings		OSD : Remote controller
AE mode	Fixed	1/60 (1/50), 1/100, 1/120, 1/125, 1/250, 1/500, 1/1000, 1/2000,
		1/4000, 1/8000, 1/10000, 1/20000, 1/50000, 1/100000 sec.
	EI	1/60 (1/50) - 1/100000 sec.
		—
White balance		ATW, AWB, PWB, MWB, USER1, USER2
AGC	ON	0 - 54dB
	OFF	0dB
MGC		0 - 54dB (6dB step)
Day/Night		ICR mechaless Day/Night
Gamma characteristics		γ≒0.45
Noise reduction		2DNR OFF/ON Level adjustable
Wide dynamic range		WDR OFF/ON Level adjustable, D-WDR OFF/ON Level adjustable
Lens iris		—
Back light compensation		BLC, HSBLC
White blemish correction		—
Sharpness		Level adjustable
Defog		OFF/ON Level adjustable
Digital zoom		—
Privacy mask		16 masks
Mirror image		OFF, V-FLIP, H-FLIP, HV-FLIP
Freeze		—
Motion detection		—
Neg.image		—
Interface		MCX connector (75Ω), 2P connector (Power in), Remote controller (RC-01)
Power supply		DC+5V - 12V
Power consumption		0.9W/180mA (DC+5V), 0.9W/75mA (DC+12V)
Operating / Storage Temperature		-10 ~ +50℃ / -30 ~ +70℃
Operating / Storage Humidity		95% RH or less (Without condensation)
Lens mount		M12 P=0,5
Standard lens		M3620BC-12 (f3.6 F2.0)
Weight		Approx. 32g
Accessories		2P cable, MCX-BNC cable

*Set at factory

Accessories
Options

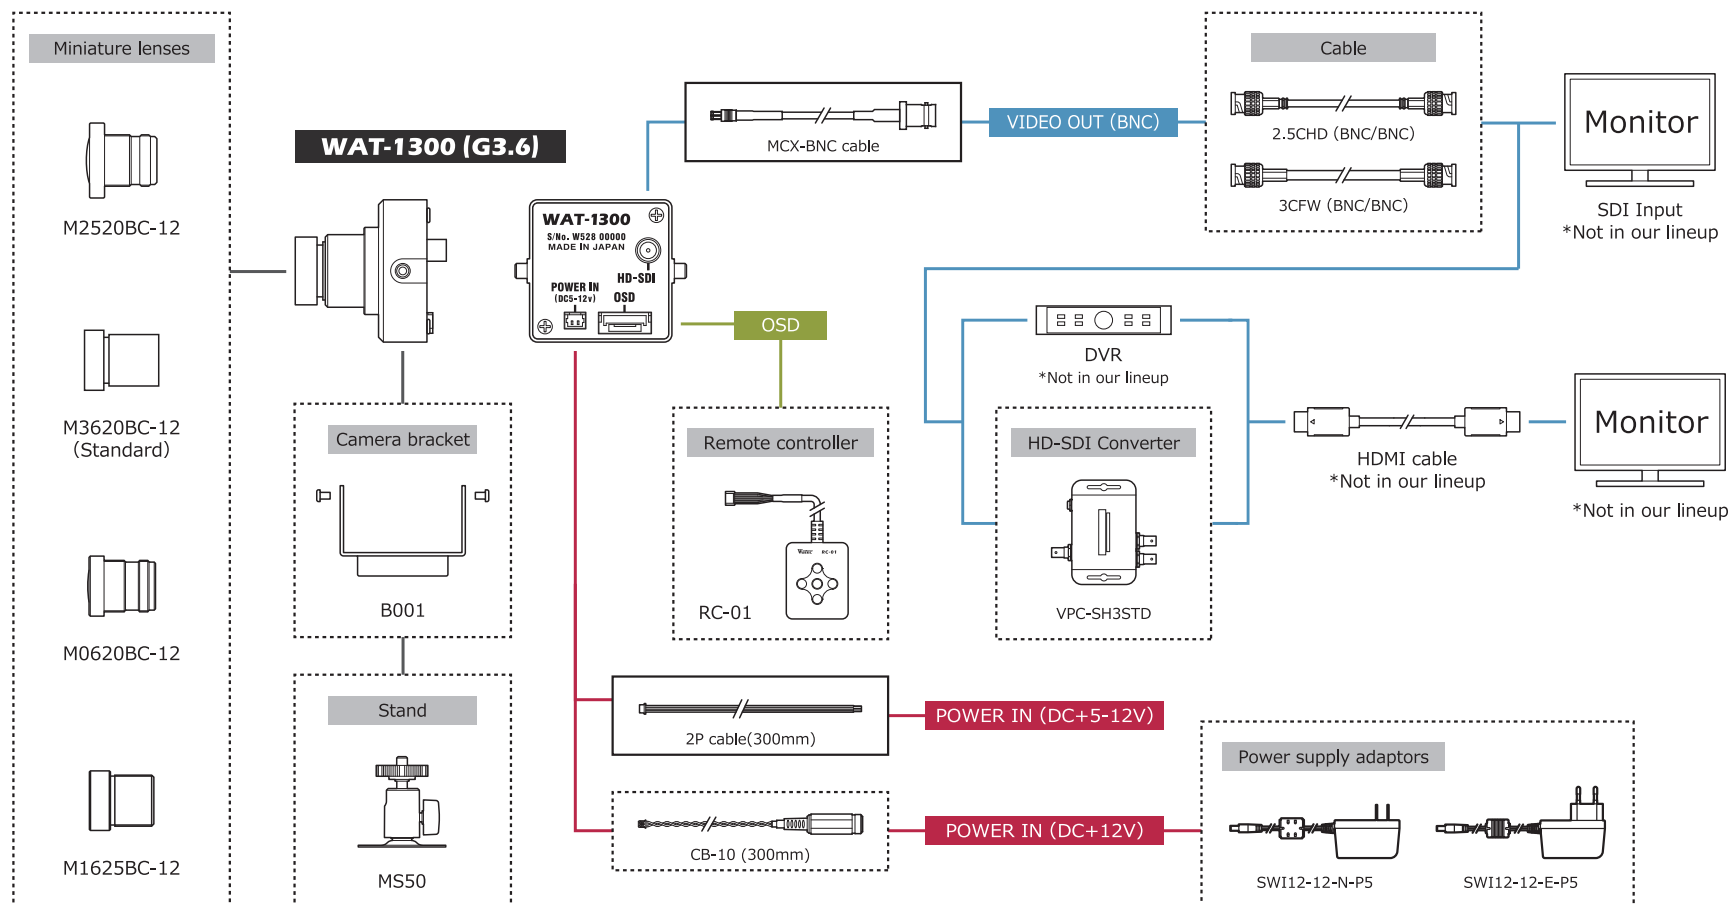

1/3.2" Ultra-compact High Sensitivity Day/Night camera


NEW



Key features

- HD-SDI 720/60p and 50p output formats enable smooth video recording with minimal delay
- Low power consumption and low heat generation by using a 1 megapixel sensor
- High sensitivity enables clear images even in low-light environments
- Despite its small size, the camera is equipped with a day/night function by using a dual-pass filter
- Advanced setting available by OSD (On Screen Display) through an optional remote control

Dimensions

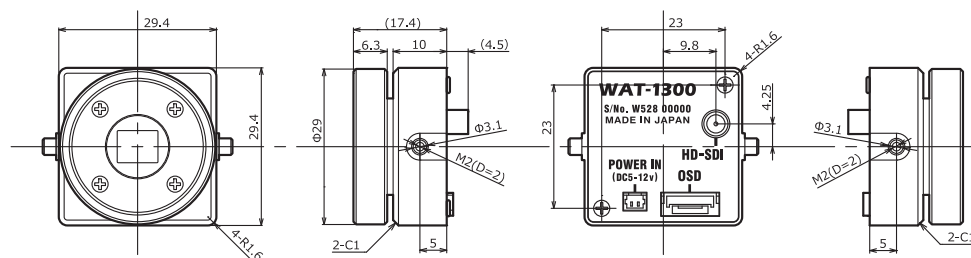

Pick-up element	1/3.2 inch CMOS image sensor	
Number of effective pixels	1280(H) × 720(V)	
Unit cell size	3.5μm(H) × 3.5μm(V)	
Imaging system	RGB+W array mosaic filters on chip	
Synchronizing system	Internal	
Scanning system	Progressive	
Video outputs	HD-SDI	
	—	
Output format	720/60p, 720/50p*	
Resolution (H)	More than 650 (Center)	
Minimum illumination	0.002 lx F1.2 (AGC ON=54dB, Shutter=OFF)	
	—	
S/N	More than 50dB (AGC OFF=0dB, γ=1.0)	
Function settings	OSD : Remote controller	
AE mode	Fixed	1/60 (1/50), 1/100, 1/120, 1/125, 1/250, 1/500, 1/1000, 1/2000,
		1/4000, 1/8000, 1/10000, 1/20000, 1/50000, 1/100000 sec.
	EI	1/60 (1/50) - 1/100000 sec.
		—
White balance	ATW, AWB, PWB, MWB, USER1, USER2	
AGC	ON	0 - 54dB
	OFF	0dB
MGC	0 - 54dB (6dB step)	
Day/Night	ICR mechaless Day/Night	
Gamma characteristics	γ≈0.45	
Noise reduction	2DNR OFF/ON Level adjustable	
Wide dynamic range	WDR OFF/ON Level adjustable, D-WDR OFF/ON Level adjustable	
Lens iris	—	
Back light compensation	BLC, HSBLC	
White blemish correction	—	
Sharpness	Level adjustable	
Defog	OFF/ON Level adjustable	
Digital zoom	—	
Privacy mask	16 masks	
Mirror image	OFF, V-FLIP, H-FLIP, HV-FLIP	
Freeze	—	
Motion detection	—	
Neg.image	—	
Interface	MCX connector (75Ω), 2P connector (Power in), Remote controller (RC-01)	
Power supply	DC+5V - 12V	
Power consumption	0.9W/180mA (DC+5V), 0.9W/75mA (DC+12V)	
Operating / Storage Temperature	-10 - +50℃ / -30 - +70℃	
Operating / Storage Humidity	95% RH or less (Without condensation)	
Lens mount	CS mount	
Weight	Approx. 25g	
Accessories	2P cable, MCX-BNC cable	

*Set at factory

Accessories
Options

